

40GHz Probe Model: DSK-F40-GSGSG-150-DF


Typical Electrical Characteristics

Frequency range	DC-40GHz
Insertion loss	Spec:<2.0dB
Return loss	Spec:>12dB
Impedance	100Ω
DC current	≤1A
DC voltage	≤100V
RF power	≤5w



Mechanical Characteristics

Connector	2.92mm Female
Tip configurations	GSGSG
Connector angle	45-degree
Pitch range	80um-1250um
Standard pitch step	25um
Tip size:	
from 100 μm to 250 μm	10um
from 300 μm to 1250 μm	10um

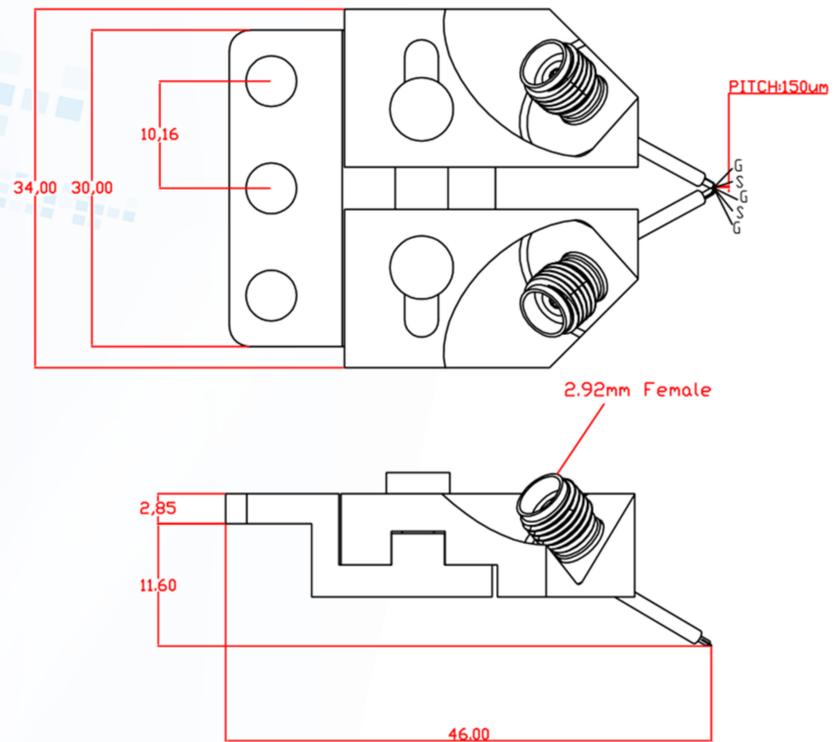

Typical Electrical Characteristics: 40 GHz GSGSG Probe, 150 micron pitch

